

Telebiz 10-5-U3 USB3.0 PTZ Camera (1080P60/30 + 5X Zoom + 85° FOV + 3 in 1 Cable+ USB3.0)



Advantages

- Ultra crystal video: with advanced DSP, 1/2.8 inch SONY sensor and high quality 5x lens;
- Smart&Solid design;
- Plug&Play, easy connection;
- **All video, control and power over single USB3.0 cable;**
- USB3.0 YUY2 video format, works with Windows, Mac OS, Android, Linux;
- Standard UVC1.5 protocol, compatible with most VC application;


Features

- USB3.0 super speed output;
- 5xoptical zoom+ 2x digital zoom;
- 85 degree ultra wide of viewing;
- 1920x1080p60/30(YUY2) high definition;
- Ultra smooth PTZ mechanism
- Accurate PanTilt motor control
- Effective RS232/485 serial control
- WDR, 3DNR, BLC, Anti-flicker feature;
- UVC control(via USB3.0 port);
- 2 Years warranty;

Input/Output Interface:



Dimensional Drawing (mm)

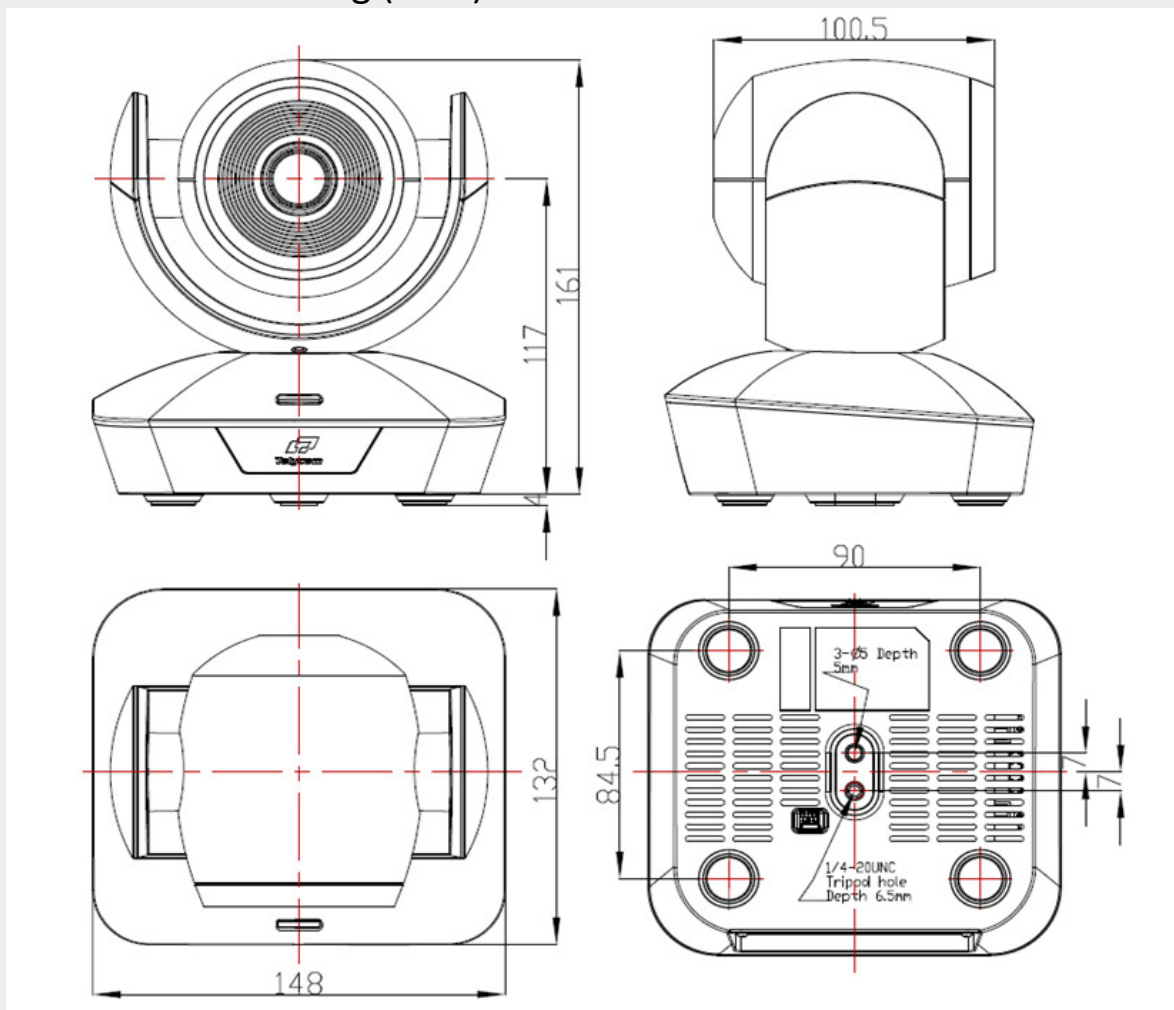

Technical Spec

Model	Telebiz 10 5 U3
Sensor	1/2.8 inch high quality, 2.1MP SONY CMOS sensor
Video System	<i>USB3.0 mode:</i> 1920x1080@60/50/30/25, 1280x720@60/50/30/25, 1024x576p30, 960x540p30, 640x360p30, 352x288p30
	<i>USB2.0 mode:</i> 1024x576@30, 960x540@30, 640x360@30, 352x288@30
Optical Zoom	5X
Digital Zoom	2X
FOV	85°
Sensor Resolution	1/2.8 inch, 5MP high quality CMOS sensor
Pan Rotation Angle	-170° ~ +170°
Tilt Rotation Angle	-30°~+ 90°
Pan rotation speed	0°~120°/s
Tilt rotation speed	0°~80°/s
Preset	10 via remote controller; 128 via Visca control.
Control Port	USB3.0/ RS232/RS485
Video Port	USB3.0
S/N Rate	>50dB
Focal Length	f= 3.1~15.5mm
Minimum Lux	0.1 lux
White Balance	Auto / Manual/Auto Tracking/OnePush/Indoor/Outdoor/
Electronic Shutter	Auto/Manual
Focus	Auto/Manual
Iris	Auto/Manual
Anti Flicker	50Hz/60Hz/OFF
WDR	Supported
BLC	Supported
2D/3D Noise Reduction	Supported
Gamma	Supported
Up-side Down Installation	Supported
Mirror Image	Supported
Input Voltage	5V 1000mA(via USB3.0Port)/ DC12V 1A (via Power Adapter)
Dimension (L x Wx H)	148mm×132mm×161mm
Net Weight	0.9KG