

Telebiz 10U3S-USB3.0 HD Video Camera




Advantages:

- Ultra crystal video: with Ambarella DSP, 1/2.8 inch SONY sensor and high quality 10xlens
- Smart&Solid design
- Fast switching between different video formats: less than 1 second
- Fast and accurate focus performance
- Easy firmware upgrade-(field-upgradable):no need to open the camera housing
- USB2.0 compatible
- Compatible with the majority of videoconferencing software(UVC1.5 protocol standard)
- With powerful functional remote controller
- Multi language OSD menu: support English, Chinese, Russian, Spanish
- 2 years warranty offered
-


Features

- Super speed USB3.0 output
- Zoom: 10X Optical Zoom & 12X Digital Zoom
- 1920x1080p 60fps high resolution
- 62.5 Degree field of view:
- Ultra smooth PTZ mechanism
- Accurate PT motor control
- Up to 128 presets
- Effective RS232/485 serial control
- WDR, 3D-noise reduction function
- Image flip function support upside-down installation
- Mounts: Wall mount & in-ceiling mount available
- Sony Visca and Pelco P/D protocol controls

Input/Output Interface

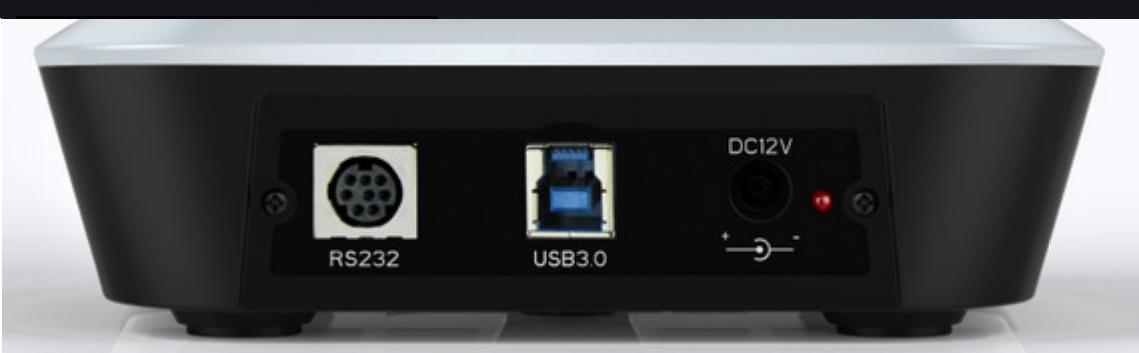

Dimensional Drawing (mm)

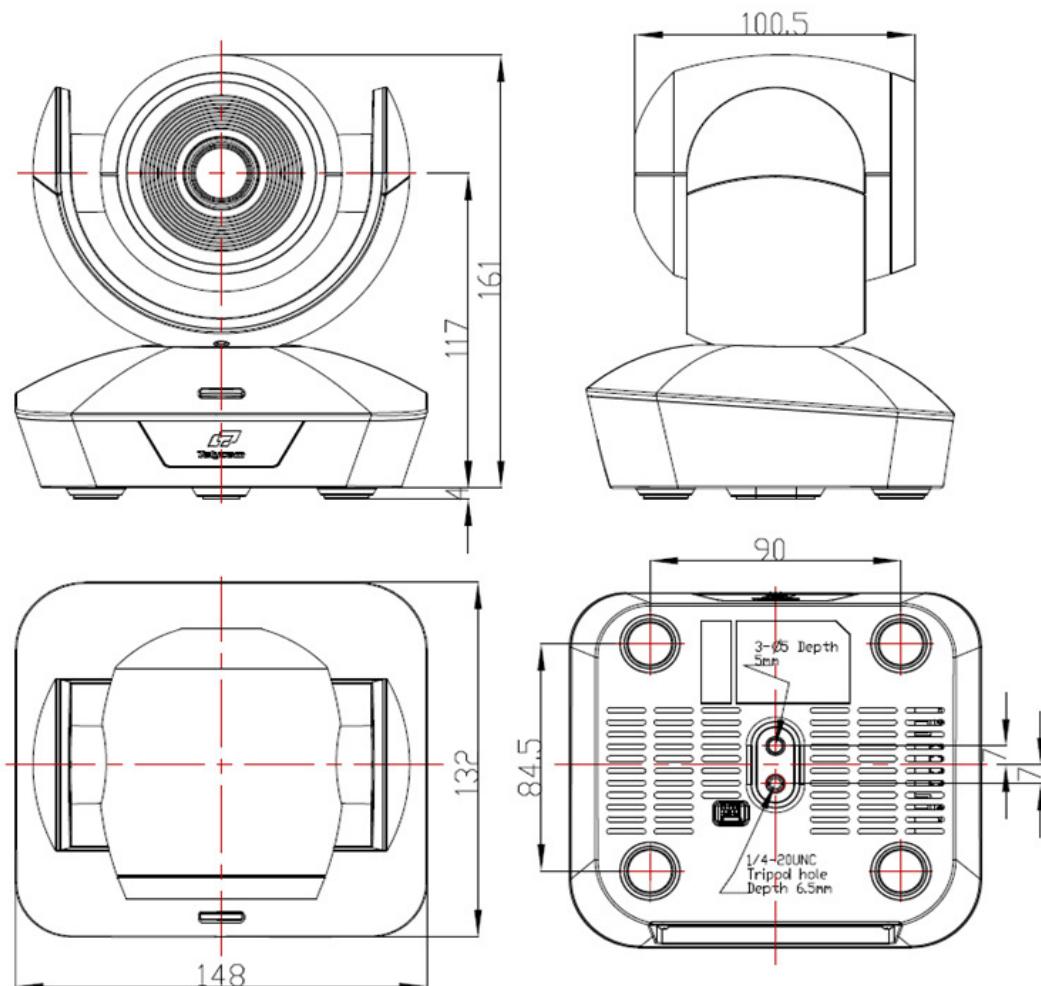

Technical specification

Model	
Sensor	1/2.8 inch high quality 5MP SONY CMOS sensor,
Video System	1080P60/50/30/25; 720P60/50/30/25; 1024x768P30; 800x600P30; 1024x576P30; 960x540P30; 704x576P30; 640x480P30; 576x448P30; 768x448P30; 640x360P30; 512x288P30; 352x288P30;176x144P30
Zoom	10x optical zoom & 12Xdigital zoom
View Angle	6.43° (wide) ~62.5° (tele)
Pan Rotation Angle	-170° ~ +170°
Tilt Rotation Angle	-30° ~ +90°
Pan rotation speed	0°~120°/s
Titl rotation speed	0°~80°/s
Preset	128
Control port	RS232 / RS485/ USB3.0
Video port	USB3.0
SNR	>50dB
Focal length	f=4.7(wide)~47mm(tele)
Minimum Lux	0.1 lux
White Balance	Auto / Manual
Focus	Auto / Manual
Iris	Auto / Manual
Electronic Shutter	Auto / Manual
BLC	Auto / Manual
Input voltage	DC12V
Dimension (Lx W x H)	148mm×132mm×161mm
Net Weight	0.9KG (2LBS)